

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 814 485 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
25.09.2002 Bulletin 2002/39

(51) Int Cl.7: **H01B 7/28**, **H01B 3/44**,
C08L 23/02, **C08K 5/04**,
C08K 5/17

(21) Application number: **96830358.6**

(22) Date of filing: **21.06.1996**

(54) **Water tree resistant insulating composition**

Gegen Wasserbäumchen widerstandsfähige Isolierungszusammensetzung

Composition isolante résistante à la formation d'arborescences dues à l'eau

(84) Designated Contracting States:
AT CH DE DK ES FI FR GB IT LI NL SE

(43) Date of publication of application:
29.12.1997 Bulletin 1997/52

(73) Proprietor: **PIRELLI CAVI E SISTEMI S.p.A.**
20126 Milano (IT)

(72) Inventors:
• **Peruzzotti, Franco**
20025 Legnano (Milano) (IT)
• **Castellani, Luca**
20094 Corsico (Milano) (IT)
• **Dagal, Luis José**
20052 Monza (Milano) (IT)
• **Garcia, Valeria**
20047 Brugherio (Milano) (IT)

(74) Representative: **Checcacci, Giorgio**
PORTA, CHECCACCI & Associati S.p.A.
Viale Sabotino 19/2
20135 Milano (IT)

(56) References cited:
• **DATABASE WPI Section Ch, Week 8204 Derwent Publications Ltd., London, GB; Class A85, AN 82-06796E XP002018914 & JP-A-56 161 443 (SHOWA ELEC WIRE KK), 11 December 1981**
• **PATENT ABSTRACTS OF JAPAN vol. 015, no. 092 (C-0811), 6 March 1991 & JP-A-02 305813 (FUJIKURA LTD;OTHERS: 01), 19 December 1990,**
• **PATENT ABSTRACTS OF JAPAN vol. 015, no. 106 (E-1044), 13 March 1991 & JP-A-02 311121 (FUJIKURA LTD), 26 December 1990,**
• **DATABASE WPI Section Ch, Week 8414 Derwent Publications Ltd., London, GB; Class A85, AN 84-085304 XP002018915 & JP-A-59 035 315 (HITACHI CABLE KK), 27 February 1984**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 814 485 B1

Description

[0001] The present invention relates to an improved electrical insulation composition. More particularly, the present invention relates to an electrical insulation that may be used effectively in the presence of water. Specifically, the present invention relates to an improved electrical insulation composition that maintains high breakdown strength over time, by minimizing the formation of water trees.

[0002] The present invention further relates to an electrical cable containing an insulation composition effective to prevent water trees in the presence of moisture.

[0003] Electrical hardware, for example, electric cable, is often used in the presence of or in direct contact with water. When electrical hardware, particularly an electric cable, is operated in the presence of water, the electrical insulation composition used to surround and insulate the hardware is often deteriorated by the water. Thus, medium and high voltage power cables may be subject to dielectric breakdown by a mechanism known in the art as "water treeing."

[0004] In the present description medium voltage power cable refers to a cable which operates at a voltage in the range from about 1 up to about 70 kV and high voltage power cable refers to a cable which operates at a voltage greater than about 70 kV. Medium and high voltage power cables are generally constructed in two basic designs. In the so-called "dry design", a metallic sheath, such as lead, encloses the cable insulation, thereby assuring that the cable insulation always remains in a perfectly dry condition. In the other, called "wet design", a polymeric sheath encloses the cable insulation and, unlike the metal sheath, this polymeric sheath cannot completely prevent diffusion of water, from the outside environment, into the cable insulation layer.

[0005] In this "wet design" second cable design, when the cable is exposed to a water or moisture containing environment, in the presence of electric stress, a degradation of the electrical breakdown strength is observed over time.

[0006] This decay of the electrical properties of the insulation under wet conditions is believed to be due to a phenomenon in the art called "water treeing".

[0007] Water treeing refers to the degradation process of the insulation resulting in the formation of microchannels or tubes having a tree-like appearance. A water tree is initiated at stored areas of water, for examples a defect in the insulation material and may become significant when an electrical field is applied to the electrical insulation.

[0008] In order to prevent early failure during the operation of the hardware, it becomes necessary to minimize the formation of water trees in the insulator surrounding the electrical hardware.

[0009] Prior art insulation materials were often modified by the addition of a material which bonds with water to avoid high local water concentration within the insulation.

[0010] A number of additives have been proposed in an attempt to minimize or prevent insulation failure by minimizing and preventing the formation of water trees.

[0011] A general discussion of this phenomenon and examples of these additives can be found in for example, U. S. Patent No. 3,499,791 to Maloney; U.S. Patent No. 3,956,420 to Kato et al.; U.S. Patent No. 3,795,646 to MacKenzie Jr.; U.S. Patent No. 4,206,260 to McMahon; U.S. Patent No. 4,370,517 to Soma et al.; U.S. Patent No. 4,293,459 to Urban et al., JP 59-35315 to Hitachi Cable and JP 02-311121 to Fujikura Ltd.

[0012] One prior art insulation material, described in U.S. Patent No. 4,305,849, combines polyethylene glycol with a polyolefin insulating material. Polyethylene glycol suffers from the disadvantage that while it is hydrophilic, making it attractive to water, it has poor compatibility with the insulating polyolefins, such as apolar polyethylene.

[0013] Because of its poor compatibility, polyethylene glycol is believed to be dispersed as small droplets throughout the polyolefin insulation, these droplets acting as points of attraction for any water diffusing within the insulation. As water accumulates around the additive, areas of high local water concentration may be generated, that can themselves result in defects.

[0014] Accordingly, it has been found that, while the addition of polyethylene glycol can delay the onset of water tree formation, over time, it usually results in an overall increase in the number of water trees found in an insulation after a certain period of time.

[0015] As noted in U.S. Patent No. 4,305,849, low hydrophilic, or hydrophobic materials, such as polypropylene glycol, do not prevent the formation of water trees in the insulation.

[0016] In order to address the problem of water tree formation, Japanese patent application JP 59-35315 discloses an electric insulator formed by crosslinking a composition prepared by adding 0.1-3.0 parts by weight of a nonionic fluorine-type surfactant to 100 parts by weight of polyethylene, ethylene-type copolymer or mixture thereof.

[0017] Japanese patent application JP 02-311121 discloses, while addressing the same problem, an electric insulator formed by extrusion molding and consisting of one or several types of copolymers selected from ethylene-ethyl acrylate copolymer, ethylene-acrylic acid copolymer, maleic acid graft ethylene-vinyl acetate copolymer, maleic acid graft ethylene-ethyl acrylate copolymer or mixtures consisting of polyethylene and one or several types of the aforementioned copolymers.

[0018] The present invention provides significant improvements over the prior art compositions by including as an additive within an electrical insulator a material that combines the properties of hydrophilicity and hydrophobicity.

[0019] According to an aspect of the present invention, it has been found that improved water treeing resistance can be obtained by using additives which:

- 1) possess sufficient hydrophilicity to allow the polyolefin to link water molecules and prevent them from diffusing in the material; and
- 2) possess sufficient hydrophobicity and compatibility with the polyolefin, to prevent loss or clustering of the additive and maintain diffused water distributed evenly in the mass.

[0020] Preferably, the additives of the invention also possess a mobility of the hydrophilic portion within the polymeric matrix suitable to allow the hydrophilic portion of the additive to effectively reach and link the diffusing water molecules.

[0021] Further advantages of the invention will be set forth in part in the description which follows and in part will be apparent from the description, or may be learned by practice of the invention. The advantages of the invention may be realized and attained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

[0022] In a first aspect, the present invention refers to an electrically insulating composition containing as a major component a polymer composition selected from the group consisting of polyolefins, characterized in that said composition further contains an effective amount of a polymeric additive having:

- a hydrophilic portion made up of polar units comprising linear alkene oxide units, said hydrophilic portion causing a water absorption in said composition within a selected absorption range;
- a hydrophobic portion compatible with said polyolefin, said hydrophobic portion causing an additive loss from said composition, by contact with water, lower than a selected loss value.

[0023] In a further aspect the present invention concerns an electrical apparatus having at least a polymeric insulation layer, said layer comprising an electrical insulating composition according to claim 23.

[0024] In particular, said selected water absorption range is such that the water content of said electrical insulating composition is at least 10% higher than that of the same pure polyolefin with the same aging and increases less than 50% in the period from 100 to 400 hours of exposure to 100% relative humidity at 80°C.

[0025] In addition, said water absorption is such that the water content of said electrical insulating composition is less than 10,000 ppm after 400 hours of exposure to 100% relative humidity at 80°C.

[0026] In particular, said hydrophobic portion of the additive causes an additive loss by contact with water which is not greater than about 20% by weight after 120 days accelerated water treeing test according to AEIC CS 5-94.

[0027] In particular, the hydrophilic portion of the additive has a mobility corresponding to a contact angle with water of said polymeric insulation of less than a preselected value; more particularly, said contact angle is less than 75° and, preferably, less than 70° (according to ASTM D 724-45, using insulating material in the place of the paper).

[0028] The polymer constituting the major component of the insulating composition is a polyolefin preferably selected from the group consisting of low, medium and high density polyethylene, linear low density polyethylene, ethylene-vinyl acetate copolymer, ethylene-ethyl acrylate copolymer, ethylene-methyl acrylate copolymer, ethylene-ethyl methacrylate copolymer, ethylene-propylene copolymer, ethylene-propylene-diene terpolymer, polypropylene, and mixtures thereof.

[0029] According to the invention, the hydrophilic portion of said additive is made up of polar units, preferably linear alkene oxide units and, more preferably, ethylene oxide.

[0030] In a preferred embodiment the compatible portion is made of aliphatic, aromatic or low polarity units; preferably a hindered alkene oxide, and, more preferably the compatible portion is propylene oxide.

[0031] Most preferably, the additive is an ethylene-oxide/propylene-oxide block copolymer, in which the ethylene oxide portion in the additive is from 50 to 80% by weight.

[0032] In another preferred embodiment the hydrophobic compatible portion and the hydrophilic portion are chemically linked to a low polarity group, preferably an amino group, particularly ethylenediamine.

[0033] Preferably, the effective amount of water-tree resistant additive is from about 0.1 to about 10% by weight and, most preferably, from about 0.2 to about 0.5% by weight.

[0034] Further details will be apparent from the following detailed description, with reference to the enclosed drawing, in which:

Figure 1 is a perspective view of an electrical cable according to the present invention.

[0035] In the figure an insulated electrical cable 1 includes a conductor 2; an internal sublayer 3; an electrically insulating layer 4; and an external sublayer 5; a metallic screen 6; and an outer sheath or jacket 7.

[0036] The conductor 2, as known in the art, is preferably made of stranded metal wires,

[0037] The internal and external sublayers 3 and 5 are preferably made of suitable compounds according to the prior art, extruded onto the conductor 2 separately from or simultaneously with the insulating layer 4.

[0038] The insulating layer 4 is preferably formed with the composition according to the present invention, described in detail below.

[0039] The internal sublayer 3, usually called in the art "conductor shield" is an electrically semiconducting layer for causing the electric field to be uniform around the conductor.

[0040] Methods and materials for making the shield layer will be readily apparent to the skilled artisan.

[0041] In a cable according to the present invention the internal sublayer 3 is preferably made of a compound based on cross-linked polyethylenealkyl acrylate, charged with carbon-black, to render it semiconducting (i.e. with a resistivity < 5 ohm/m at room temperature).

[0042] The external sublayer 5, usually called in the art "insulation shield" is a semiconductive layer; methods and materials for making this layer will be readily apparent to the skilled artisan.

[0043] In a cable according to a preferred embodiment of the present invention the external sublayer 5 is made from a compound based on EVA (ethylenevinyl acetate), charged with carbon-black to make it semiconducting.

[0044] Such layer, as is well known to the skilled in the art, has the object of circumscribing the electrical field round the conductor.

[0045] Externally to the outer semiconductive layer 5 there is a metallic screen 6, made of electrically conducting wires or tapes, helically wound, and a sheath or jacket 7 in polyvinylchloride (PVC) or thermoplastic polyethylene (PE).

[0046] In an example, a medium voltage cable, defined as 1/0 AWG (American Wire Gauge), 175 mils (4.45 mm) insulation thickness, for a voltage of 8.7-15 kV, can have the following dimensions

- conductor cross-section = 53.5 mm²;
- diameter of conductor = 9.30 mm;
- external diameter of inner semiconductive layer = 10.10 mm
- external diameter of the insulating layer = 19.00 mm
- external diameter of outer semiconductive layer = 21.00 mm
- outer sheath diameter = about 27.00 mm.

[0047] The polymeric electrical insulating composition for insulation layer 4 of the present invention has as its major component an insulating polymer selected from the group consisting of polyolefins.

[0048] The insulating polymer of the present invention may be, for example, polyethylene or a copolymer or terpolymer produced using comonomers selected from, for example, propylene, butene-1, hexene-1, octene-1, decene-1, norbornene, butadiene, vinyl acetate, ethyl acrylate, methyl acrylate, isobutyl acrylate and methyl vinyl ether and mixtures thereof.

[0049] Insulating polymers which may be used in accordance with the present invention may be selected from, for example, low, medium and high density polyethylene, linear low density polyethylene, ethylene-vinyl acetate copolymer, ethylene-ethyl acrylate copolymer, ethylene-methyl acrylate copolymer, ethylene-ethyl methacrylate copolymer, ethylene-propylene copolymer, ethylene-propylene-diene terpolymer, polypropylene and mixtures thereof.

[0050] The term linear low density polyethylene, to the purposes of the present invention, includes polymers with a density between 0.86 and 0.93, such as, for example, those known in the art as LLDPE (linear low density polyethylene), VLDPE (very low density linear polyethylene).

[0051] The insulating polymers for use in the present invention may or may not be crosslinked.

[0052] One preferred insulating polymer of the present invention is low density polyethylene (LDPE), more preferably cross-linked polyethylene (XLPE).

[0053] The density of preferred insulating polymers for use in the present invention is preferably less than about 0.93 kg/l, more preferably between about 0.86 and about 0.93 kg/l, and most preferably about 0.92 kg/l. Preferred insulating polymers of the present invention have a melt flow index of between about 0.02 and about 20 g/10 min most preferably between about 1 and about 4.0 g/10 min, and most preferably about 2.0 g/10 min.

[0054] The afore described insulating polymers constitutes the major component in the preferred electrical insulation composition of the present invention. Preferred cable insulation compositions of the present invention contain an anti-treeing additive in an amount of from about 0.01 to about 10% by weight, more preferably from about 0.1 to about 3% by weight, most preferably from about 0.2 to about 1 % by weight.

[0055] The additive according to the present invention has 1) an hydrophilic portion made up of polar units comprising linear alkene oxide units; 2) a hydrophobic portion compatible with the polyolefin; and preferably has a mobility that allows the hydrophilic portion to effectively reach and link water molecules.

[0056] By hydrophobic portion, to the purpose of the present invention, we mean a molecular portion which, when the additive is dispersed or otherwise blended in the insulating polymer, shows a sufficient chemical affinity with the insulating polymer to cause the additive to remain stably dispersed in the insulation in the operating condition of the

cable or electric hardware including the insulation.

[0057] By hydrophilic portion, to the purpose of the present invention, we mean a molecular portion which, when the additive is dispersed or otherwise blended in the insulating polymer, shows a sufficient chemical affinity with water to maintain it stably linked to the additive in the operating condition of the cable or electric hardware including the insulation.

[0058] In one embodiment of the present invention, the anti-treeing additive for use with the present invention combines a hydrophilic portion with a hydrophobic portion to improve the compatibility of the additive with the polyolefin while retaining the benefit of the hydrophilic additive.

[0059] The hydrophilic portion of the additive is preferably selected from polar units, more preferably linear alkene oxide units, most preferably ethylene-oxide units. The hydrophobic portions of the additive are preferably selected from units having little or no polarity, more preferably from hindered alkene oxide units, most preferably propylene oxide.

[0060] A preferred additive according to the present invention is selected from ethyleneoxypropyleneoxy copolymers. The copolymers may be in any structure, randomized, alternating or block copolymers. Examples of these copolymers are commercially available under the trade name PLURONIC from BASF or SYNPERONIC from ICI.

[0061] The compositions of the present invention may contain additional components, including cross-linking agents, antioxidants, fillers, processing aids, lubricants and pigments. The range of available materials which may be added to the composition of the present invention is not limited and includes those materials which do not adversely affect the insulating properties of the composition.

[0062] Cross-linking agents for use in the present invention include peroxide cross-linking agents selected from organic peroxides, such as dicumylperoxide; bis(terbutylperoxy-isopropyl)benzene; terbutylcumylperoxide and mixtures thereof.

[0063] Antioxidants for use in the present invention include polymerized trimethyl dihydroquinoline; 4,4'-thiobis(3-methyl-6-t-butyl)phenol; pentaerythrityl-tetrakis[3-(3,5-diterbutyl-4-hydroxyphenyl)propionate]; and 2,2'-thiodiethylenbis-[3-(3,5-diterbutyl-4-hydroxyphenyl)propionate] and mixtures thereof.

[0064] Fillers for use in the present invention include glass particles, glass fibers, calcinated clay, talc, mixtures thereof, and the like. Processing aids for use in the present invention include calcium stearate, zinc stearate, stearic acid, paraffinic wax and mixtures thereof.

[0065] The following examples are not to be construed as limiting the invention as described herein.

Examples

[0066] A number of compositions were prepared as described below.

Comparative Example 1


[0067] Example 1 is a control sample of cross-linked polyethylene (XLPE) containing no tree-retardant additive. This material provided a reference for comparing prior art additives and those of the present invention.

[0068] The insulation material of the control was prepared by combining 100 parts of low density polyethylene, ESCORENE LD 400 from Exxon; with 0.34 parts (per 100 parts polymer) of a phenolic antioxidant, SANTONOX R CABLE GRADE from Flexis; and 2.20 parts (per 100 parts of polymer) of dicumylperoxide, DICUP from Hercules.

Comparative Examples 2-4

[0069] Each of the insulation materials was prepared by adding to the composition described in Example 1 above 0.50 parts (per 100 parts of polymer) of an additive described below.

[0070] In Examples 2 and 3 ethoxyacrylate additives were added in accordance with U.S. Patent No. 4,370,517. The basic structure of these additives is:



where the group $\text{CH}_2\text{CH}_2\text{O}$ is the ethylene oxide group, designated in the following EO.

[0071] These additives become grafted to the polyethylene, during peroxide crosslinking, at both sides of the molecular chain (i.e. the unsaturated ends).

[0072] Both the additives of examples 2, 3 were supplied by Cray Valley, under the name Sartomer.

[0073] In example 2 Sartomer 252, was used, having value $n = 13$, i.e. 13 EO groups.


[0074] In Example 2 the ester group content is 12%, the EO content is 79%, and the total O is 35% by mole percent in the additive molecule.

[0075] In Example 3 Sartomer 205 was used, having value $n = 3$, i.e. 3 EO groups.

[0076] In Example 3 the ester group content is 31%, the EO content is 46%, total O is 34% by mole percent in the additive molecule.

[0077] Example 4 uses a polyethylene glycol additive in accordance with U.S. Patent No. 4,305,849.

[0078] The structure of the additive is:



[0079] The tested additive was supplied by Aldrich under the name of PEG 8000.

[0080] The total O content of this material was 36.4% (approx. in the additive molecule).

[0081] Average molecular weight about 8000.

Examples 5-7

[0082] Examples 5-7 are electrical insulation materials according to the present invention.

[0083] Each of the insulation materials was prepared by adding to the composition described in Example 1 above 0.50 parts (per 100 parts of polymer) of an additive described below.

[0084] Examples 5 and 6 are ethyleneoxy, propyleneoxy copolymers having 80% EO units and 50% EO units respectively.

[0085] The basic structure of these additives is:



where the group $-(\text{CH}_2\text{CH}(\text{CH}_3)\text{O})_m-$ is the propylene oxide unit, designated in the following PO.

[0086] The tested additives were supplied by BASF under the name of PLURONIC.


[0087] In Example 5 the additive was Pluronic 6800, having an EO/PO ratio of 80/20 and an O content approximately of 34.6% in the additive molecule.

[0088] Average molecular weight was about 8500.

[0089] In Example 6 the additive was Pluronic 10500, having an EO/PO ratio of 50/50 and an O content approximately of 32% in the additive molecule.

[0090] Average molecular weight was about 6500.

[0091] Example 7 is an ethoxy/propoxy diamine derivative material (diethylamine ethoxy/propoxylate), having the structure:

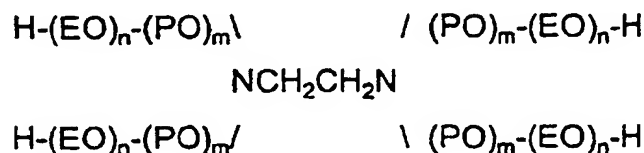

[0092] The ratio n/m for this material was 40/60.

[0093] The tested additive was supplied by BASF under the name of Tetronic 904.

[0094] The additive had an average molecular weight of 6700 (g/mol), an EO content of 40%, and a total O content of 30% (approx. in the additive molecule).

Example 8

[0095] The above samples were tested in accordance with the EFI test method as described in H. Faremo and E. Ildstad, "The EFI test method for accelerated growth of water trees" IEEE, 1990.

[0096] The electrical insulation compositions described above were obtained by melt-blending all noted additives into the polyolefin insulating matrix, i.e. polyethylene.

[0097] The blends were then processed in a laboratory Brabender twinscrew mixer at the temperature of the melted components, i.e. about 130°C.

[0098] Curing was done at about 180°C.

[0099] The two insulation shields used to monitor aging were made of LE 0592, semiconductive material/supplied by Borealis.

[0100] The aging conditions used for the tests examples were as follows:

a)	Temperature	70°C, continuous heating
b)	Electrical Stress	5 kV/mm, 50 Hz a.c.

[0101] Tap water was maintained in the specimen cup.

[0102] After 10 and 30 days of aging (180 days for one example), electrical breakdown strength (Eb) was measured. The aged values were compared with unaged samples to obtain the water tree resistance performance of the insulation materials.

[0103] Tests results are summarized in Table 1 below.

Table 1

Example	Additive	Commer.	Supplier	Electrical Breakdown (kV/mm)				
	Type	Name		original	after aging (days)			retained value
					10	30	180	after 30 days (%)
1	none	Escorene LD 400	Exxon	105	50	45	-	43
2	*acrylate(n) ethox y derivate, n= 13	Sartomer 252	Cray Valley	124	82	80	-	64
3	*acrylate(n) ethox y derivate, n= 3	Sartomer 205	Cray Valley	117	62	51	-	43
4	*PEG	PEG 8000	Aldrich	107	83	70	-	65
5	EO/PO 80/20	Pluronic 6800	BASF	110	110	98	85	89
6	EO/PO 50/50	Pluronic 10500	BASF	115	99	94	-	82
7	ethoxy/propoxy diamine deriv.	Tetronic 904	BASF	105	85	81	-	77

* Prior art insulation additives

Example 9

[0104] The hydrophilicity of the additives of Examples 1, 4 and 5 has been evaluated by measuring the water uptake in a conditioning room at 100% relative humidity at 80°C.

[0105] Plaques of 200x200 mm, 1.5 mm thickness were prepared by compression molding and cross-linking the compositions of Examples 1, 4, 5 at a pressure of 200 bar and a temperature of 180°C for a time of 30 min.

[0106] After molding the plaques were thermally conditioned for 3 days at 90°C in order to eliminate the by-products of cross-linking.

[0107] The plaques were exposed in a conditioning room at 100% of relative humidity and a temperature of 80°C.

[0108] Water content tests were carried out with a Karl-Fisher instrument.

[0109] The results are set forth below in Table 2 below.

Table 2

Conditioning Time	Example 1* (Polyethylene)	Example 4** (Polyethylene & PEG)	Example 5*** Polyethylene & EO/PO copolymer
(hours)	Water content (ppm)	Water content (ppm)	Water content (ppm)
19	2200	6500	5600

* Reference;

** Comparative;

*** Invention

Table 2 (continued)

Conditioning Time	Example 1* (Polyethylene)	Example 4** (Polyethylene & PEG)	Example 5*** Polyethylene & EO/PO copolymer
(hours)	Water content (ppm)	Water content (ppm)	Water content (ppm)
43	2600	7560	6570
115	2800	11420	7050
211	3500	19740	7730
355	3900	21730	8150

* Reference;

** Comparative;

*** Invention

[0110] Table 2 shows that the presence of the additive provides a certain degree of water absorption (i.e. a certain amount of hydrophilicity) to the polymer, when compared with pure polyethylene.

[0111] Specifically, in pure polyethylene the water content, after an initial period of relatively rapid increase (lasting about 100 hours), increases very slowly over time, about 450-500 ppm every 100 hours.

[0112] In the comparative composition of Example 4, the water content increases substantially regularly over the entire test period, and at a higher rate than that of pure polyethylene.

[0113] Specifically, comparative composition of Example 4 gains more than 4000 ppm of water every 100 hours, without showing a tendency to stabilize.

[0114] The inventive composition of Example 5, by contrast, exhibits a faster water content increase than pure polyethylene (similar to that of Example 4) in the first 100 hours period, but thereafter it shows a slower water content increase (at a rate similar to that of pure polyethylene).

[0115] By comparing the result set forth in Table 2 with those set forth in Table 1, it can be observed that, while a certain amount of hydrophilicity of the compound is useful to reduce electrical breakdown strength decay, continued or significant increases in this property are not useful to this purpose.

[0116] In addition, it must be noted that an excessively high water absorption value, as caused by excessive hydrophilicity of the additive or by an excessive amount thereof in the polyolefin composition, causes an increase of the tan δ value of the composition, which is unacceptable in a cable insulation, because of the associated power losses.

[0117] As it is known in the art, an electrical insulation of a cable through which an alternating current flows is the seat of losses, so that the vector representing the current is out of phase by an angle $\Phi = 90^\circ - \delta$ on the vector representing the voltage. In fact, in an electrical circuit of the reactive type, that is containing inductances and capacities, real power P (watt) is defined $P = V I \cos \phi$, where ϕ is the out of phase angle between current and voltage.

[0118] $\tan \delta = \cos \phi$, for very small angles δ , as is the case of good insulators. The angle δ is defined as the "loss angle" and $\tan \delta$ is defined as the "loss factor". In the case of alternating current cables, significant values of $\tan \delta$ lead to a reduction of total power transmitted.

Example 10

[0119] The compatibility of the additive, i.e. the capability of the additive to remain in place within the polymer, has been evaluated.

[0120] The sample with the electrical insulation composition of Example 5, after its use in the electrical breakdown strength test of Example 8, in which it was aged for 6 months, was further evaluated by infrared spectroscopy to determine if there was any decrease in the amount of additive present.

[0121] In 8 measurements, a maximum decrease of less than 10% was observed and an average decrease of about 5% from the unaged sample.

[0122] For the composition of Example 4, on the basis of comparative thermal aging measurements, an additive loss speed about four times greater than that of Example 5 had been evaluated.

[0123] Table 1 shows that superior electrical breakdown retention values can be obtained with additives having a hydrophobic portion, compatible with the polyolefin polymeric matrix (Examples 5, 6, 7).

[0124] According to an aspect of the present invention, it is believed that the obtained superior electrical breakdown retention values can be attributed in part to the high capability of the additive of becoming linked to the polyolefin matrix (by chemical compatibility, i.e. hydrophobicity).

[0125] This is believed to prevent substantial migration of the additive within the polyolefin matrix and thus, the

formation of water accumulation sites which may themselves act as a structural defect causing water tree formation.

[0126] While a hydrophilic portion and a compatible portion are present in Examples 2 and 3, the relatively lower results obtained with these low molecular weight acrylate monomers (both suitable to be grafted to the polyolefin matrix), can be explained in terms of mobility of the hydrophilic portion of the additive.

[0127] These additives, when introduced in the polyethylene matrix and grafted therewith, lack mobility, due to the limited ability of the hydrophilic portion of the additive to get in contact with diffusing water: its bonded extremities limit the ability of the hydrophilic portion of the additive to get in contact with the diffusing water molecules.

Example 11

[0128] For each of the Examples 1-7 above, the mobility of the hydrophilic portion of the additive in the polymer has been evaluated by determining the wettability of the electrical insulating compositions including the additives.

[0129] In particular, a relatively high wettability value of the additive containing composition was considered to be due to a correspondingly high mobility of the hydrophilic portion of the additive, which can easily reach the surface and get in contact with water, allowing it to distribute on a larger surface.

[0130] Plaques were made as described in the Example 9 above, with the compositions of Examples 1, 4 and 5.

[0131] Wettability was measured by determining the contact angle value according to the method described in ASTM D 724-45, using the plaques in the place of the paper. Tap water was used as test liquid.

[0132] The contact angle values for the remaining compounds has been estimated on the basis of theoretical considerations on the additive molecular structure.

[0133] The results are shown in the following Table 3.

Table 3

Example	Additive Type	Contact Angle Value
1	none (pure XLPE)	90
2	*acrylate(n)ethoxy derivate, n = 13	about 80
3	*acrylate(n)ethoxy derivate, n = 3	about 85-90
4	*PEG	77
5	EO/PO 80/20	64
6	EO/PO 50/50	about 70
7	ethoxy/propoxy diamine deriv.	about 65-70

[0134] Thus, compositions having a contact angle not greater than 75° are preferred in the present invention. More preferred are compositions with a contact angle of not greater than 73° and, most preferably, not greater than 70°.

[0135] It must be observed that the values given in Table 3 are related to the specific additive content in the compositions (0.5%); higher amounts of additive can increase the wettability, but excessively high amounts of additive determine high water absorption values, which would be not acceptable in an electric cable.

Example 12

[0136] Samples were prepared with the compositions of Examples 5 and 6 with varied amounts of the additive material, according to the EFI model described above, and tested after 30 days aging. The results are set forth in Table 4, below.

Table 4

Additive Conc. in XLPE (%)	Electrical breakdown after 30 days aging (Kv/mm)	
	copolymer EO/PO 80/20	copolymer EO/PO 50/50
0.1	65	--
0.2	88	71
0.5	98	94
1.0	105	101

Table 4 (continued)

Additive Conc. in XLPE (%)	Electrical breakdown after 30 days aging (Kv/mm)	
	copolymer EO/PO 80/20	copolymer EO/PO 50/50
1.6	--	105

Example 13

[0137] Cables were made with the following structure, according to AEIC CS 5-94 specification:

Cable type: 1/0 AWG (American Wire Gauge), 175 mils (4.45 mm) insulation thickness, 15 kV.

- conductor cross-section = 53.5 mm²;
- diameter of conductor = 9.30 mm;
- external diameter of inner semiconductive layer = 10.10 mm
- external diameter of the insulating layer = 19.00 mm
- external diameter of outer semiconductive layer = 21.00 mm

the metallic screen was made of 6 evenly spaced copper wires, having 1.6 mm diameter; no outer sheath was used.

[0138] The conductor was a stranded conductor made of 19 aluminum wires.

[0139] No filler was used inside the conductor.

[0140] Insulation types:

the insulation of a first cable was made with the composition of Example 5 and the insulation of a second cable was made with the composition of Example 1 (reference, pure XLPE).

[0141] The cable was first subjected to 14 thermal load cycles according to AEIC CS 5-94 specification and then subjected to the accelerated water treeing test (AWTT) procedure.

[0142] After 120 days aging the average AC breakdown strength (kV/mm) was determined (the average breakdown strength was measured dividing the relevant voltage value by the insulation thickness).

[0143] The results of the test are reported in table 5 below:

Table 5

Insulation type	average AC breakdown strength (kV/mm)	
	original value (after thermal cycles)	120 days AWTT aging
Example 1	47	20
Example 5	45	43

[0144] No substantial decay of breakdown strength was observed with the composition of Example 5 compound, while with pure XLPE more than 50% decay was observed.

[0145] The results above are well in accordance with the tests on EFl model of Example 8 and corresponding results can be expected in cables with the other tested compositions.

[0146] After the AWTT test, on the cable using the compound of Example 5 additive content was measured; no significant variation of the additive concentration was measured after 120 days aging compared with the original value (0.5%).

[0147] It is believed that the good water tree resistant properties of the composition according to the present invention are due to a balance of:

- a) the hydrophilic properties of the additive, i.e., the capability of blocking the water molecules diffusing in the matrix;
- b) the hydrophobic properties of the additive and its compatibility with the insulation polymer matrix, i.e. the affinity of the additive to the matrix, permitting a constant and even distribution of the additive in the matrix; and
- c) the mobility of the hydrophilic portion, i.e. its capability of reaching diffusing water,

which, in combination, provide the final result.

[0148] As discussed above, in one aspect of the invention, the effect of the wettability on the result is believed to be

related to the controlled "mobility" of the additive in the matrix (i.e. the capability of the additive, or at least of the hydrophilic portion thereof, to move sufficiently to get in contact with the diffusing water molecules, without being excessively free so as to allow migration of the additive itself, resulting in either the consequent formation of clusters or micro-droplets of water and additive in the matrix, or a "washing away" of the additive over time).

[0149] Preferred electrical insulation compositions of the present invention comprise an additive having controlled hydrophilic properties, wherein the water content of the composition is at least 10% greater than that of the pure polyolefin (at the same aging) and increases less than 50% upon exposure to 100% relative humidity at 80°C in the period from 100 to 400 hours of exposition.

[0150] Preferred electrical insulation compositions of the present invention can be further characterized by an additive having controlled hydrophobic properties, wherein after an aging time of 6 months in water under an electric stress of 5 kV/mm and 70°C temperature, the residual concentration of additive in the composition is not less than 30% of the original content.

[0151] Preferred electrical insulation compositions of the present invention further comprise an additive having controlled mobility, such as a selected additive amount provides a wettability of the electrical insulation composition which corresponds to a contact angle of water on the surface of the compound, measured according to ASTM D 724-45, lower than about 75 °.

[0152] According to a further aspect of the present invention, the additive can be used not only in the cable insulation layer, but also in other places within the cable, such as, for example, the inner and outer semiconductive layers, or the conductor (in which the additive can be inserted as a component of a filling composition), in an appropriate amount, which can be determined by the skilled in the art to provide the results of the invention.

[0153] Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification and practice of the invention disclosed herein.

[0154] It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the invention being indicated by the following claims.

Claims

1. An electrically insulating composition containing as a major component a polymer composition selected from the group consisting of polyolefins,
characterized in that said composition further contains an effective amount of a polymeric additive having:
 - a hydrophilic portion made up of polar units comprising linear alkene oxide units, said hydrophilic portion causing a water absorption in said composition within a selected absorption range;
 - a hydrophobic portion compatible with said polyolefin, said hydrophobic portion causing an additive loss from said composition, by contact with water, lower than a selected loss value.
2. The electrically insulating composition according to claim 1, **characterized in that** the additive has more than about 30% of oxygen atoms in the molecule.
3. The electrically insulating composition according to claim 1, wherein the linear alkene oxide is ethylene oxide.
4. The electrically insulating composition according to claim 1, **characterized in that** the hydrophobic portion is made of aliphatic, aromatic or low polarity units.
5. The electrically insulating composition according to claim 4, **characterized in that** the hydrophobic portion is a hindered alkene oxide.
6. The electrically insulating composition according to claim 4, **characterized in that** the hydrophobic portion is propylene oxide.
7. The electrically insulating composition according to claim 6, **characterized in that** the additive is an ethylene-oxide/propylene-oxide block copolymer.
8. The electrically insulating composition according to claim 7, **characterized in that** the ethylene oxide portion in the additive is from 35 to 95% by weight.
9. The electrically insulating composition according to claim 8, **characterized in that** the ethylene oxide portion in

the additive is from 50 to 80% by weight.

10. The electrically insulating composition according to claim 1, **characterized in that** the hydrophobic portion and the hydrophilic portion are chemically linked to a low polarity group.

11. The electrically insulating composition according to claim 12, **characterized in that** the hydrophobic portion and the hydrophilic portion are chemically linked to an amino group.

12. The electrically insulating composition according to claim 11, **characterized in that** the amino group is ethylene-diamine.

13. The electrically insulating composition according to claim 1, wherein said effective amount of water-tree resistant additive is from about 0.01 to about 10% by weight.

14. The electrically insulating composition according to claim 13, wherein said effective amount of water-tree resistant additive is from about 0.2 to about 1% by weight.

15. The electrically insulating composition according to claim 1, **characterized in that** said hydrophilic portion causes a water absorption in the composition such that the water content thereof is at least 10% higher than that of the pure polymer composition with the same aging and increases less than 50% in the period from 100 to 400 hours of exposure to 100% relative humidity at 80°C.

16. The electrically insulating composition according to claim 1, **characterized in that** said hydrophilic portion causes a water absorption in the composition such that the water content thereof is less than 10,000 ppm after 400 hours of exposure to 100% relative humidity at 80°C.

17. The electrically insulating composition according to claim 1, **characterized in that** the hydrophilic portion of the additive has a mobility corresponding to a contact angle with water of said polymeric insulation layer of less than 75°.

18. The electrically insulating composition according to claim 17, **characterized in that** said contact angle is less than 70°.

19. The electrically insulating composition according to claim 1, **characterized in that** said polyolefin is selected from the group consisting of low, medium and high density polyethylene, linear low density polyethylene, ethylene-vinyl acetate copolymer, ethylene-ethyl acrylate copolymer, ethylene-methyl acrylate copolymer, ethylene-ethyl methacrylate copolymer, ethylene-propylene copolymer, ethylene-propylene-diene terpolymer, polypropylene, and mixtures thereof.

20. The electrically insulating composition according to claim 1, **characterized in that** said hydrophobic portion of the additive causes an additive loss in an accelerated aging test in water not greater than about 30% by weight after 6 months aging.

21. The electrically insulating composition according to claim 1, **characterized in that** it has an electrical breakdown strength decay in the insulation composition lower than 30% in a 30 days accelerated aging test in water.

22. The electrically insulating composition according to claim 21, **characterized in that** said accelerated aging is measured on a planar sample with semiconductive layers, at 70°C with 5 kV/mm electrical stress.

23. An electrical apparatus (1) having at least a polymeric layer (3, 4, 5), said layer (3, 4, 5) comprising an electrical insulating composition according to anyone of claims 1-22.

24. The electrical apparatus (1) according to claim 23, **characterized in that** said hydrophobic portion of the additive causes an additive loss by contact with water not greater than 20% by weight after 120 days accelerated water treeing test according to AEIC CS 5-94.

25. The electrical apparatus (1) according to claim 23, **characterized in that** it has a residual electrical breakdown strength greater than about 35 kV/mm upon 120 days accelerated water treeing test according to AEIC CS 5-94.

26. Use of a polymeric additive as defined in any of the preceding claims 1-22 as a water tree retardant for reducing water trees growth in a polymeric layer (3, 4, 5) or filling composition of an electrical apparatus (1).

5 Patentansprüche

1. Elektrisch isolierende Zusammensetzung, enthaltend als einen Hauptbestandteil eine Polymerzusammensetzung ausgewählt aus der Gruppe bestehend aus Polyolefinen, **dadurch gekennzeichnet, daß** die Zusammensetzung weiter eine wirksame Menge eines Polymeradditives mit:
 - 10 - einem hydrophilen Teil, der aus polaren Einheiten, umfassend lineare Alkenoxid-Einheiten gebildet ist, wobei der hydrophile Teil eine Wasserabsorption in der Zusammensetzung innerhalb eines ausgewählten Absorptionsbereiches hervorruft;
 - 15 - einen hydrophoben Teil, der mit dem Polyolefin kompatibel ist, wobei der hydrophobe Teil einen Additivverlust aus der Zusammensetzung durch Kontakt mit Wasser hervorruft, der niedriger ist als ein ausgewählter Verlustwert.
2. Elektrisch isolierende Zusammensetzung gemäß Anspruch 1, **dadurch gekennzeichnet, daß** das Additiv mehr
 - 20 als ungefähr 30 % Sauerstoffatome in dem Molekül hat.
3. Elektrisch isolierende Zusammensetzung gemäß Anspruch 1, in dem das lineare Alkenoxid Ethylenoxid ist.
4. Elektrisch isolierende Zusammensetzung gemäß Anspruch 1, **dadurch gekennzeichnet, daß** der hydrophobe
 - 25 Teil aus aliphatischen, aromatischen Einheiten oder Einheiten mit niedriger Polarität gebildet ist.
5. Elektrisch isolierende Zusammensetzung gemäß Anspruch 4, **dadurch gekennzeichnet, daß** der hydrophobe Teil ein gehindertes Alkenoxid ist.
6. Elektrisch isolierende Zusammensetzung gemäß Anspruch 4, **dadurch gekennzeichnet, daß** der hydrophobe
 - 30 Teil Propylenoxid ist.
7. Elektrisch isolierende Zusammensetzung gemäß Anspruch 6, **dadurch gekennzeichnet, daß** das Additiv ein Ethylenoxid/Propylenoxid-Blockcopolymer ist.
8. Elektrisch isolierende Zusammensetzung gemäß Anspruch 7, **dadurch gekennzeichnet, daß** der Ethylenoxid-
 - 35 Teil in dem Additiv von 35 bis 95 Gew.-% ist.
9. Elektrisch isolierende Zusammensetzung gemäß Anspruch 8, **dadurch gekennzeichnet, daß** der Ethylenoxid-
 - 40 Teil in dem Additiv von 50 bis 80 Gew.-% ist.
10. Elektrisch isolierende Zusammensetzung gemäß Anspruch 1, **dadurch gekennzeichnet, daß** der hydrophobe Teil und der hydrophile Teil chemisch mit einer Gruppe mit niedriger Polarität verbunden sind.
11. Elektrisch isolierende Zusammensetzung gemäß Anspruch 12, **dadurch gekennzeichnet, daß** der hydrophobe
 - 45 Teil und der hydrophile Teil chemisch mit einer AminoGruppe verbunden sind.
12. Elektrisch isolierende Zusammensetzung gemäß Anspruch 11, **dadurch gekennzeichnet, daß** die AminoGruppe Ethylendiamin ist.
13. Elektrisch isolierende Zusammensetzung gemäß Anspruch 1, in der die wirksame Menge an wasserbäumchen-
 - 50 bildungsbeständigem Zusatz von ungefähr 0,01 bis ungefähr 10 Gew.-% ist.
14. Elektrisch isolierende Zusammensetzung gemäß Anspruch 13, in der die wirksame Menge an wasserbäumchen-
 - 55 bildungsbeständigem Zusatz von ungefähr 0,2 bis ungefähr 1 Gew.-% ist.
15. Elektrisch isolierende Zusammensetzung gemäß Anspruch 1, **dadurch gekennzeichnet, daß** der hydrophile Teil eine Wasserabsorption in der Zusammensetzung hervorruft, so daß der Wassergehalt davon mindestens 10 %

nöher als der der reinen Polymerzusammensetzung mit dem gleichen Altern ist und weniger als 50 % in der Zeitspanne von 100 bis 400 Stunden des Aussetzens an 100 % relative Feuchtigkeit bei 80°C ansteigt.

16. Elektrisch isolierende Zusammensetzung gemäß Anspruch 1, **dadurch gekennzeichnet, daß** der hydrophile Teil eine Wasserabsorption in der Zusammensetzung hervorruft, so daß der Wassergehalt davon weniger als 10 000 ppm nach 400 Stunden des Aussetzens an 100 % relative Feuchtigkeit bei 80°C ist.
17. Elektrisch isolierende Zusammensetzung gemäß Anspruch 1, **dadurch gekennzeichnet, daß** der hydrophile Teil des Additivs eine Mobilität entsprechend einem Kontaktwinkel mit Wasser der polymeren Isolationsschicht von weniger als 75° hat.
18. Elektrisch isolierende Zusammensetzung gemäß Anspruch 17, **dadurch gekennzeichnet, daß** der Kontaktwinkel weniger als 70° ist.
19. Elektrisch isolierende Zusammensetzung gemäß Anspruch 1, **dadurch gekennzeichnet, daß** das Polyolefin aus der Gruppe bestehend aus Polyethylen mit niedriger, mittlerer und hoher Dichte, linearem Polyethylen mit niedriger Dichte, Ethylen-Vinylacetat-Copolymer, Ethylen-Ethylacrylat-Copolymer, Ethylen-Methylacrylat-Copolymer, Ethylen-Ethylmethacrylat-Copolymer, Ethylen-Propylen-Copolymer, Ethylen-Propylen-Dien-Terpolymer, Polypropylen und Mischungen davon ausgewählt ist.
20. Elektrisch isolierende Zusammensetzung gemäß Anspruch 1, **dadurch gekennzeichnet, daß** der hydrophobe Teil des Additivs einen Additivverlust in einem beschleunigten Alterungstest in Wasser von nicht größer als ungefähr 30 Gew.-% nach 6 Monaten Altern hervorruft.
21. Elektrisch isolierende Zusammensetzung gemäß Anspruch 1, **dadurch gekennzeichnet, daß** sie einen elektrischen Durchschlagsfestigkeitsabfall in der Isolationszusammensetzung von nieder als 30 % in einem 30-tägigen beschleunigten Alterungstest in Wasser hat.
22. Elektrisch isolierende Zusammensetzung gemäß Anspruch 21, **dadurch gekennzeichnet, daß** das beschleunigte Altern an einer planaren Probe mit halbleitenden Schichten bei 70°C mit 5 kV/mm elektrischer Beanspruchung gemessen wird.
23. Elektrischer Apparat (1) mit mindestens einer polymeren Schicht (3, 4, 5), wobei die Schicht (3, 4, 5) eine elektrisch isolierende Zusammensetzung gemäß einem der Ansprüche 1 bis 22 umfaßt.
24. Elektrischer Apparat (1) gemäß Anspruch 23, **dadurch gekennzeichnet, daß** der hydrophobe Teil des Additivs einen Additivverlust durch Kontakt mit Wasser von nicht größer als 20 Gew.-% nach 120 Tagen beschleunigtem Wasserbäumchenbildungstest gemäß AEIC CS 5-94 hervorruft.
25. Elektrischer Apparat (1) gemäß Anspruch 23, **dadurch gekennzeichnet, daß** er eine restliche elektrische Durchschlagsfestigkeit größer als ungefähr 35 kV/mm nach 120 Tagen beschleunigtem Wasserbäumchenbildungstest gemäß AEIC CS 5-94 hat.
26. Verwendung eines Polymeradditivs gemäß einem der vorangehenden Ansprüche 1 bis 22 als ein Wasserbäumchenbildungsverzögerer zum Reduzieren des Wasserbäumchenwachstums in einer polymeren Schicht (3, 4, 5) oder Füllzusammensetzung eines elektrischen Apparats (1).

Revendications

1. Composition électriquement isolante contenant comme composant principal, une composition de polymères choisie dans l'ensemble constitué par les polyoléfines, **caractérisée en ce que** ladite composition contient en outre une quantité efficace d'un additif polymérique présentant :
 - une partie hydrophile faite de motifs polaires comprenant des motifs oxyde d'alkylène linéaire, ladite partie hydrophile entraînant une absorption d'eau de ladite composition dans un intervalle d'absorption choisi ;
 - une partie hydrophobe compatible avec ladite polyoléfine, ladite partie hydrophobe entraînant une perte d'additif de ladite composition, par contact avec l'eau, inférieure à une valeur de perte choisie.

2. Composition électriquement isolante selon la revendication 1, **caractérisée en ce que** l'additif comporte plus d'environ 30 % d'atomes d'oxygène dans la molécule.
3. Composition électriquement isolante selon la revendication 1, **caractérisée en ce que** l'oxyde d'alkylène linéaire est l'oxyde d'éthylène.
4. Composition électriquement isolante selon la revendication 1, **caractérisée en ce que** la partie hydrophobe est faite de motifs aliphatiques, aromatiques ou de faible polarité.
5. Composition électriquement isolante selon la revendication 4, **caractérisée en ce que** la partie hydrophobe est un oxyde d'alkylène encombré.
6. Composition électriquement isolante selon la revendication 4, **caractérisée en ce que** la partie hydrophobe est l'oxyde de propylène.
7. Composition électriquement isolante selon la revendication 6, **caractérisée en ce que** l'additif est un copolymère bloc oxyde d'éthylène/oxyde de propylène.
8. Composition électriquement isolante selon la revendication 7, **caractérisée en ce que** la partie oxyde d'éthylène dans l'additif représente de 35 à 95 % en poids.
9. Composition électriquement isolante selon la revendication 8, **caractérisée en ce que** la partie oxyde d'éthylène dans l'additif représente de 50 à 80 % en poids.
10. Composition électriquement isolante selon la revendication 1, **caractérisée en ce que** la partie hydrophobe et la partie hydrophile sont chimiquement liées à un groupe de faible polarité.
11. Composition électriquement isolante selon la revendication 12, **caractérisée en ce que** la partie hydrophobe et la partie hydrophile sont chimiquement liées à un groupe amino.
12. Composition électriquement isolante selon la revendication 11, **caractérisée en ce que** le groupe amino est une éthylènediamine.
13. Composition électriquement isolante selon la revendication 1, dans laquelle ladite quantité efficace d'additif conférant une résistance à la formation d'arborescences dues à l'eau est comprise entre environ 0,01 et environ 10 % en poids.
14. Composition électriquement isolante selon la revendication 13, dans laquelle ladite quantité efficace d'additif conférant une résistance à la formation d'arborescences dues à l'eau est comprise entre environ 0,2 et environ 1 % en poids.
15. Composition électriquement isolante selon la revendication 1, **caractérisée en ce que** ladite partie hydrophile entraîne une absorption d'eau de la composition telle que la teneur en eau de celle-ci est supérieure d'au moins 10 % à celle de la composition de polymères pure présentant un même vieillissement, et augmente de moins de 50 % sur une durée de 100 à 400 heures d'exposition à une humidité relative de 100 % à 80 °C.
16. Composition électriquement isolante selon la revendication 1, **caractérisée en ce que** ladite partie hydrophile entraîne une absorption d'eau de la composition telle que la teneur en eau de celle-ci est inférieure à 10 000 ppm après une exposition de 400 heures à une humidité relative de 100 % à 80 °C.
17. Composition électriquement isolante selon la revendication 1, **caractérisée en ce que** la partie hydrophile de l'additif a une mobilité correspondant à un angle de contact avec l'eau de ladite couche isolante polymérique, inférieur à 75 °.
18. Composition électriquement isolante selon la revendication 17, **caractérisée en ce que** ledit angle de contact est inférieur à 70 °.
19. Composition électriquement isolante selon la revendication 1, **caractérisée en ce que** ladite polyoléfine est choisie

dans l'ensemble constitué par un polyéthylène basse densité, moyenne densité ou haute densité, un polyéthylène linéaire basse densité, un copolymère éthylène/acétate de vinyle, un copolymère éthylène/acrylate d'éthyle, un copolymère éthylène/acrylate de méthyle, un copolymère éthylène/méthacrylate d'éthyle, un copolymère éthylène/propylène, un terpolymère éthylène/propylène/diène, un polypropylène et leurs mélanges.

- 5 20. Composition électriquement isolante selon la revendication 1, **caractérisée en ce que** ladite partie hydrophobe de l'additif entraîne une perte d'additif au cours d'un essai de vieillissement accéléré dans l'eau qui n'est pas supérieur à environ 30 % en poids, après un vieillissement de 6 mois.
- 10 21. Composition électriquement isolante selon la revendication 1, **caractérisée en ce qu'elle** présente une dégradation de la rigidité diélectrique dans la composition isolante inférieure à 30 % au cours d'un essai de vieillissement accéléré de 30 jours dans l'eau.
- 15 22. Composition électriquement isolante selon la revendication 21, **caractérisée en ce que** ledit vieillissement accéléré est mesuré sur un échantillon planaire avec des couches semi-conductrices, à 70 °C, avec une tension électrique de 5 kV/mm.
- 20 23. Appareil électrique (1) présentant au moins une couche polymérique (3, 4, 5), ladite couche (3, 4, 5) comprenant une composition électriquement isolante selon l'une quelconque des revendications 1 à 22.
- 25 24. Appareil électrique (1) selon la revendication 23, **caractérisé en ce que** la partie hydrophobe de l'additif entraîne une perte d'additif par contact avec l'eau, qui n'est pas supérieure à 20 % en poids après un essai de formation accélérée d'arborescences dues à l'eau de 120 jours selon la norme AEIC CS 5-94.
- 30 25. Appareil électrique (1) selon la revendication 23, **caractérisé en ce qu'il** présente une rigidité diélectrique résiduelle supérieure à environ 35 kV/mm au cours d'un essai de formation accélérée d'arborescences dues à l'eau de 120 jours selon la norme AEIC CS 5-94.
- 35 26. Utilisation d'un additif polymérique tel que défini dans l'une quelconque des revendications précédentes 1 à 22 comme agent retardant la formation d'arborescences dues à l'eau pour réduire la croissance des arborescences dues à l'eau dans une couche polymérique (3, 4, 5) ou une composition de remplissage d'un appareil électrique.
- 40
- 45
- 50
- 55

1999, 11/18, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 903, 904, 905, 906, 907, 908, 909, 910, 911, 912, 913, 914, 915, 916, 917, 918, 919, 920, 921, 922, 923, 924, 925, 926, 927, 928, 929, 930, 931, 932, 933, 934, 935, 936, 937, 938, 939, 940, 941, 942, 943, 944, 945, 946, 947, 948, 949, 950, 951, 952, 953, 954, 955, 956, 957, 958, 959, 960, 961, 962, 963, 964, 965, 966, 967, 968, 969, 970, 971, 972, 973, 974, 975, 976, 977, 978, 979, 980, 981, 982, 983, 984, 985, 986, 987, 988, 989, 990, 991, 992, 993, 994, 995, 996, 997, 998, 999, 1000

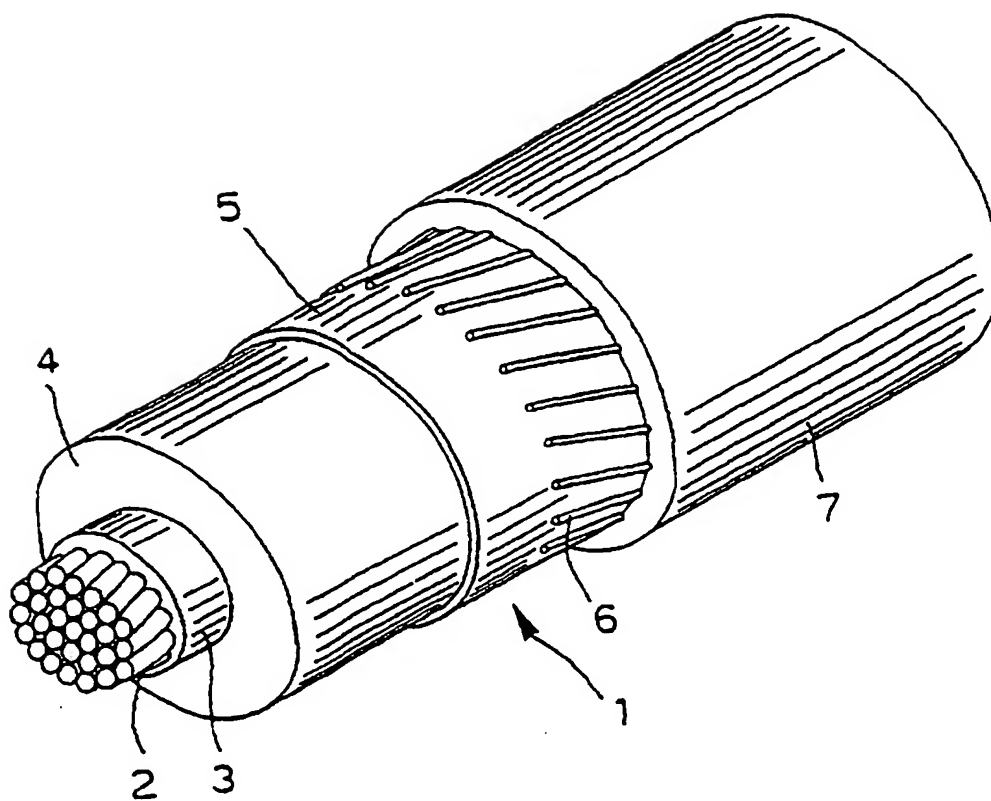


FIG. 1

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.